

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 246 118 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

02.10.2002 Bulletin 2002/40

(51) Int Cl.7: **G06K 7/10, G06K 9/20**(21) Application number: **02251672.8**(22) Date of filing: **08.03.2002**

(84) Designated Contracting States:


**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

Designated Extension States:

AL LT LV MK RO SI(30) Priority: **26.03.2001 US 817572**(71) Applicant: **Pips Technology Inc****Knoxville, Tennessee, TN3922-3827 (US)**(72) Inventor: **Kennedy, James M.****Palm Desert, CA 92260 (US)**(74) Representative: **Pluckrose, Anthony William et al****BOULT WADE TENNANT,****Verulam Gardens****70 Gray's Inn Road****London WC1X 8BT (GB)**(54) **Apparatus for reading indicia from a remote location**

(57) The present invention relates to an apparatus (10) provided for reading indicia (12), such as a bar code, from a remote location. The apparatus (10) includes a light source (16) for illuminating the indicia (12), preferably with infrared illumination. The indicia (12) is incorporated in a reflective medium, disposed remotely from the light source (16), which reflects the illumination provided by the light source (16). The apparatus (10) includes a light sensing device (26) also disposed remotely from the reflective medium (14). The light sensing device (26) receives the reflected image of the indicia (12) and generates an indicia image signal based thereon. An indicia processing system (38,40,42) receives and operates on the indicia image signal to ex-

tract indicia information therefrom. The light source (16) and the light sensing device (26) may be located up to 75 feet (22.86m) or more away from the reflective medium, and the reflective medium may be moving at speeds of up to 85 miles per hour (37.995m/s) or more relative to the light source (16) and the light sensing device (26). To prevent blurring of the reflected indicia image, the infrared illumination is preferably provided in pulses, and the light sensing device (26) is shuttered in synchronism with the pulses. The indicia (12) and reflective medium (14) may be attached to a motor vehicle, a trailer portion of a tractor/trailer rig, a railroad box car or container, or any other type of vehicle, package, or cargo container.

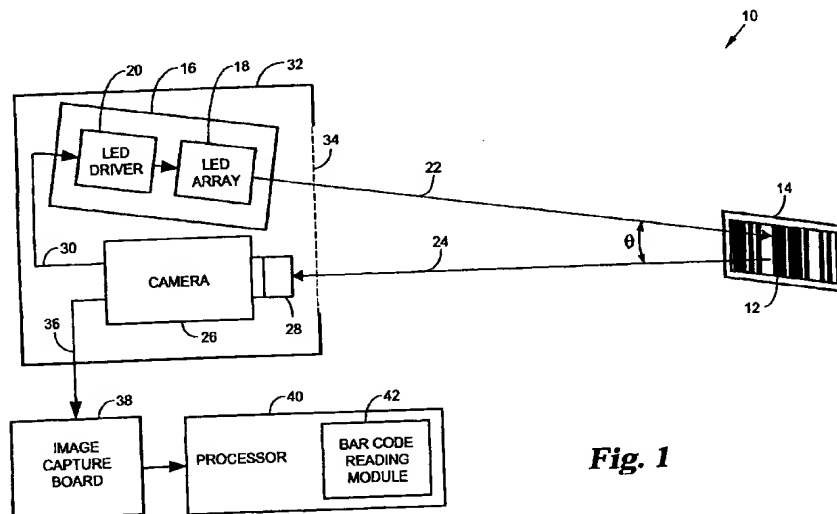**Fig. 1****EP 1 246 118 A1**

Description

[0001] The present invention is generally directed to an apparatus for reading indicia from a remote location, e.g. indicia on a vehicle, container, or package. More particularly, the invention is directed to a system for reading bar codes on moving vehicles, containers, or packages from a remote location.

[0002] Motorists who daily use a pay-for-park parking garage often pay for use of the garage on a monthly or yearly basis. To gain access to the garage, these motorists are typically issued a key card which they insert into a card reader to open a gate. Typically, using such a key card requires the motorist to stop the vehicle, roll down a window or open a door, and insert and retract the card. Such systems present unnecessary impediments to the motorist's access to the garage.

[0003] Motorists who often use a toll road may also pay for use of the road on a monthly or yearly basis, or on a pay-per-use basis. In some known systems, radio-frequency transponders are issued to the motorist which transmit a signal to a receiving device alongside an on-ramp or off-ramp. These signals from the transponder identify the motorist, and provide for billing the motorist for the use of the toll road, or for opening a gate to give the motorist access to the toll road. Typically, these transponders require mounting on or in the vehicle, and they must be powered by their own batteries or by the vehicle's battery. Such transponders add significant cost to the toll road access and billing system, a cost which is typically passed on to the motorist in the form of higher tolls.

[0004] What is needed, therefore, is an inexpensive, easy to implement, easy to use, and low-maintenance means for identifying moving vehicles and other types of moving containers or packages, such as vehicles entering parking garages or toll roads, or containers moving along a conveyor belt.

[0005] The present invention in a first aspect provides an apparatus for reading indicia from a remote location, comprising: a light source for providing illumination; a reflective medium disposed remotely from the light source, the reflective medium including indicia operable to reflect the illumination provided by the light source, where portions of the illumination reflected from the indicia comprise a reflected indicia image; a light sensing device disposed remotely from the reflective medium, the light sensing device operable to receive the reflected indicia image and operable to generate an indicia image signal based thereon; and an indicia processing system for receiving the indicia image signal and for operating on the indicia image signal to extract indicia information therefrom.

[0006] The problems mentioned above are solved by an apparatus according to the invention. The apparatus includes a light source for illuminating the indicia, preferably with infrared illumination. The indicia is included in a reflective medium, disposed remotely from the light

source, which reflects the illumination provided by the light source. The portions of the illumination reflected from the indicia comprise a reflected indicia image. The apparatus includes a light sensing device which is also disposed remotely from the reflective medium. The light sensing device receives the reflected indicia image and generates an indicia image signal based thereon. An indicia processing system receives and operates on the indicia image signal to extract indicia information therefrom. The indicia and reflective medium may be attached to a motor vehicle, a trailer portion of a tractor/trailer rig, a railroad box car or container, or any other type of vehicle, package, or cargo container.

[0007] In preferred embodiments of the invention, the light source and the light sensing device may be located up to 75 feet (22.86m) or more away from the reflective medium, and the reflective medium may be moving at speeds of up to 85 miles per hour (37.995 m/s) or more relative to the light source and the light sensing device.

To prevent blurring of the reflected indicia image, the infrared illumination is preferably provided in pulses, and the light sensing device is shuttered in synchronism with the pulses.

[0008] Thus, the invention provides a means for reading a bar code, or other such indicia, on a vehicle or container moving at a high rate of speed. Since the light sensing device need not be immediately adjacent the bar code in order to read it, the invention may be used to read the bar code from the side of or from above a highway, railroad track, or conveyor belt as the vehicle, railroad car, or container speeds by.

[0009] In a second aspect the present invention provides a method of identifying an object, the method comprising affixing to the object a reflective medium including indicia; illuminating the reflective medium using a light source disposed remotely from the reflective medium, with the indicia reflecting the illumination provided by the light source and with the portions of the illumination reflected from the indicia comprising a reflected indicia image; using a light sensing device disposed remotely from the reflective medium to receive the reflected indicia image and to generate an indicia image signal based thereon; and processing the indicia image signal to extract indicia information therefrom; wherein: the reflective medium affixed to the object includes as indicia a bar code invisible to a naked human eye.

[0010] Further advantages of the invention will become apparent by reference to the detailed description of preferred embodiments when considered in conjunction with the drawings, which are not to scale, wherein like reference characters designate like or similar elements throughout the several drawings as follows:

Fig. 1 is a functional block diagram of a system for remotely reading indicia according to a preferred embodiment of the invention; and
Fig. 2 depicts hidden bar codes applied to license plate frames according to several preferred embod-

iments of the invention.

[0011] The bar code has long been the preferred means for encoding identifying information, such as on product packaging for purposes of inventory control. A major hurdle for adapting bar code technology to applications other than inventory control has been the necessity for the bar code to be quite close to the bar code reading device (typically a laser) as the bar code is read. Depicted in Fig. 1 is a preferred embodiment of a system 10 for remotely reading a bar code 12, or any other type of indicia, from as far away as about 75 feet (22.86m) or more as the bar code 12 is moving at speeds of up to about 85 miles-per-hour (37.995 m/s) or more relative to the rest of the system 10. Thus, the system 10 provides means for remotely reading bar codes and other indicia attached to motor vehicles moving at highway speeds.

[0012] Preferably, the bar code 12 is provided on a reflective medium 14, such as a retro-reflective tape manufactured by the 3M corporation. The term "retro-reflective" is used herein to refer to reflective media which provide high levels of reflectance along a direction back toward the source of illuminating radiation. Although in the preferred embodiment of the invention, the reflective medium 14 is retro-reflective tape, it should be appreciated that other types of reflective surfaces could be used. Thus, the invention is not limited in scope to any particular type of reflector on which the bar code 12 is provided.

[0013] The bar code 12 is illuminated by a light source 16, which preferably includes an array 18 of light emitting diodes (LED's) driven by an LED driver circuit 20. In the preferred embodiment, the array 18 includes 40 to 400 LED's, where the exact number is determined by the brightness of illumination required for a particular application. In the preferred embodiment, the LED's used in the array 18 are manufactured by Siemens under part number SFH4503.

The LED's preferably have a continuous current rating of about 100 mA, but may be driven with pulses having ten times the continuous rating.

[0014] Preferably, the LED's emit infrared radiation having a wavelength in the range of about 770 to 1100 nanometres, with a centre wavelength of approximately 940 nm or 880 nm. A centre wavelength of greater than about 800 nm is preferred so that the illumination is not visible to the human eye. A centre wavelength of about 940 nm is most preferred, because at that wavelength, sunlight is partially absorbed by water vapour in the atmosphere. Thus, at about 940 nm, background interference due to sunlight has less detrimental effect on the operation of the system. One skilled in the art will appreciate that the actual operational wavelength may be selected based upon the particular application of the system, and that the invention is not limited by operation at any particular wavelength.

[0015] The LED driver circuit 20 provides the LED ar-

ray 18 with high-energy pulses having current amplitudes of preferably about 1000 mA. In the preferred embodiment, the driver circuit 20 provides pulses having pulse widths of about one millisecond at a pulse rate of about 50-60 pulses per second. The exact pulse rate is generally determined by the standard frequency of the source power in the country of use. For example, in the United Kingdom, the pulse rate may be 50 HZ, while in the United States, the pulse rate may be 60 HZ.

[0016] The pulsed light energy from the LED array 18 is directed along an illumination path 22 to the reflective medium 14.

[0017] With continued reference to Fig. 1, the system 10 further includes a light sensing device, such as a camera 26. In the preferred embodiment, the camera 26 is a video camera, such as the model number P356 manufactured by Pearpoint, Inc., which incorporates a charge-coupled-device (CCD) sensor that is sensitive to infrared radiation at wavelengths up to 1100 nm. The camera 26 is mechanically or electronically shuttered, but is most preferably electronically shuttered. In the preferred embodiment, when the shutter is activated (opened), the camera 26 sends a trigger pulse to the light source 16 over the line 30 to activate the light source 16 to generate a light pulse simultaneously with the opening of the shutter. Preferably, the width of the light pulse is substantially the same as the shutter open time. Coincident with the trigger pulse, the electronic shutter activates the CCD sensor of the camera 26 to receive light reflected from the reflective medium 14 and to generate an indicia image signal based thereon. The shutter activates the CCD sensor to receive light for a period of about 0.1 to 1.0 mS, and most preferably for about 1.0 mS. Longer shutter times could be used if there is less relative motion between the reflective medium 14 and the camera 26. Thus, the shutter "open" period corresponds to the pulse width of the illuminating pulse from the light source 16, and the timing of the shutter "open" period is in synchronism with the timing of the illuminating pulse.

[0018] As shown in Fig. 1, the preferred embodiment of the invention includes an infrared band pass filter 28 having a pass band substantially centred on the peak output wavelength of the LED array 18. The bandwidth of the filter 28 is sufficient to pass most of the energy of the reflected infrared pulse, while rejecting light of other wavelengths, such as from sunlight and vehicle headlamps.

[0019] As depicted in Fig. 1, the beam of infrared energy from the light source 16 is reflected from the reflective medium 14 to form a reflected image of the bar code 12. The bar code image includes dark portions where little or no infrared energy is reflected toward the camera 26, and light portions where the infrared energy is reflected back toward the camera 26 from the retro-reflective material. This reflected image propagates toward the camera 26 along a reflected image path 24 which forms an angle θ with the illumination path 22. In the

preferred embodiment of the invention, this angle θ is no greater than about two degrees. Since the retro-reflective material of the reflective medium 14 reflects most of the radiation from the light source 16 back toward the light source 16, it is desirable to keep the angle θ as small as possible. Thus, the camera 26 is preferably positioned as closely as possible to the light source 16.

[0020] In the preferred embodiment, the light source 16 and camera 26 are housed within a common protective housing 32 to protect them from inclement weather. The housing 32 preferably includes an infrared transparent window 34 through which the light source 16 transmits infrared illumination toward the reflective medium 14 and through which the camera 26 receives the reflected image. In an alternative embodiment of the invention, the window 34 also serves as an infrared band pass filter having properties similar to those of the filter 28 described above. In this embodiment, the separate band pass filter 28 attached to the camera 26 is not necessary.

[0021] The use of pulsed infrared illumination enhances the operation of the system 10 in several ways. When illuminated with infrared radiation, a bar code constructed from retro-reflective materials provides a crisp, high-contrast reflected image, regardless of the time of day or amount of ambient illumination. Further, because the infrared illumination can be pulsed at such a high level, and the retro-reflective material returns such a high percentage of incident infrared light back toward the camera 26, a very fast shutter speed can be employed. This fast shutter speed virtually eliminates blurring of the reflected bar code image as the bar code 12 moves in relation to the camera 26. Even at highway speeds of up to 85 mph (37.995 m/s), the bar code image received by the CCD sensor of the camera 26 is of sufficient quality to recognize each distinct feature in the bar code 12.

[0022] One skilled in the art will appreciate that by proper selection of the illumination power of the light source 16, the width of the illumination pulses, and the shutter open time, the system 10 may be made to operate at distances of much larger than 75 feet (22.86m) and at relative speeds of much greater than 85 mph (37.995 m/s). The distances and speeds described herein for a preferred embodiment are merely examples which are consistent with the application of the system 10 in reading bar codes 12 on vehicles moving at typical highway speeds. Thus, it should be appreciated that the invention is not limited to any particular relative speed or separation distance between the camera 26 and the bar code 12.

[0023] As depicted in Fig. 1, the indicia image signal is provided from the camera 26 to an image acquisition board 38 through an interface cable 36. The image acquisition board 38, such as model number PCI-1411 manufactured by National Instruments Corporation of Austin, Texas, or model number DT3153 manufactured by Data Translation, Inc. of Marlboro, Massachusetts, captures and formats the indicia image signal to be pro-

essed by a digital processor 40. The processor 40, such as a Pentium III processor manufactured by Intel, preferably processes the indicia image signal as a bit-mapped image, although other image formats may be used, such as JPEG or GIF.

[0024] The processor 40 extracts the bar code information from the indicia image signal based on processing instructions provided by a bar code reading software module 42. In the preferred embodiment, the module 42 operates on the bit-mapped image captured by the image acquisition board 38 to determine whether a bar code 12 is present in the image, and if so, to detect the individual bars in the image that comprise the bar code 12. Preferably, the module 42 detects the bar code 12 within the indicia image by analysing the image for a combination of spatial and spectral features representative of a bar code. The orientation of the bar code 12 is preferably determined by similar means, and the bar code image is then processed orthogonal to the bars to determine the coding. Since the bar code image is two-dimensional, it may be processed along many such lines orthogonal to the bars of the bar code 12.

[0025] Fig. 2 depicts three different visible light images 50, 52, 54 of three embodiments of a vehicle license plate 44 surrounded by a license plate cover or frame 46 that includes a covert bar code 12. Attached to the lower portions of each of the frames 46 is the reflective medium 14 containing the bar code 12. In image 50, the frame 46 is constructed of a material, such as Perspex Black 962 manufactured by ICI Acrylics Ltd., which transmits infrared light, but which is opaque to visible light. The reflective medium 14 depicted in image 50 is attached to the back side of the frame 46, such that the reflective medium 14 (shown in dashed outline) is not detected when the frame 46 is viewed from the front side in visible light. However, as depicted in the infrared image 56, the reflective medium 14 and the bar code 12 are detected when the front side of the frame 46 is illuminated by infrared light from the light source 16 and viewed by the camera 26. In this embodiment, the infrared illumination passes through the frame 46, is reflected from the reflective medium 14, passes again through the frame 46, and is detected by the camera 26. Since the frame 46 does not pass visible light, the bar code 12 is not seen under visible light. This covertness thwarts those who might otherwise counterfeit a visible bar code for use on a vehicle to gain unauthorized access to a parking facility or for use on a toll road.

[0026] In another embodiment, as depicted in the visible-light image 52 of Fig. 2, the reflective medium 14 and bar code 12 are applied to the front side of the frame 46 and are concealed by other graphic components 58, such as a phrase consisting of alphanumeric characters. The graphic components 58 which conceal the bar code 12 are transparent to infrared light, so that the reflected infrared image detected by the camera 26 appears as depicted in the image 56 of Fig. 2. In this embodiment, since the illumination need not pass through

the frame 46, it may be constructed from materials that are not transmissive to infrared radiation, such as metal.

[0027] In a further embodiment, as depicted in the visible-light image 54 of Fig. 2, the reflective medium 14 and bar code 12 are on the front side of the frame 46 and are again concealed by other graphic components 58. In this embodiment, the concealing graphic components 58, which are transparent to infrared light, comprise a "decoy" bar code. This embodiment is used to thwart bar code counterfeiters who will mistake the visible decoy bar code for the actual bar code 12. Again, the reflected infrared image detected by the camera 26 appears as depicted in the image 56 of Fig. 2.

[0028] It will be appreciated that the reflective medium 14 and bar code 12 of the embodiments depicted in images 52 and 54 could be incorporated as part of the license plate 44 rather than as part of a separate license plate cover or frame 46. It will also be appreciated that a concealed reflective medium 14 and bar code 12 could be embedded in an infrared-transparent body panel of a vehicle or in the sun screen material which is typically applied to the upper portions of vehicle windshields or rear window panels. Thus, the scope of the invention is not limited to any particular method for applying the bar code 12 or any particular location on the vehicle or container.

[0029] It is contemplated, and will be apparent to those skilled in the art from the preceding description and the accompanying drawings that modifications and/or changes may be made in the embodiments of the invention. Accordingly, it is expressly intended that the foregoing description and the accompanying drawings are illustrative of preferred embodiments only, not limiting thereto, and that the true spirit and scope of the present invention be determined by reference to the appended claims.

Claims

1. An apparatus (10) for reading indicia from a remote location, comprising:

a light source (16) for providing illumination;
a reflective medium (14) disposed remotely from the light source (16), the reflective medium (14) including indicia (12) operable to reflect the illumination provided by the light source (16), where portions of the illumination reflected from the indicia (12) comprise a reflected indicia image;
a light sensing device (26) disposed remotely from the reflective medium (14), the light sensing device (26) operable to receive the reflected indicia image and to generate an indicia image signal based thereon; and
an indicia processing system (38, 40, 42) for receiving the indicia image signal and for operat-

ing on the indicia image signal to extract indicia information therefrom.

2. The apparatus of claim 1 wherein the indicia (16) are invisible to a naked human eye and the light source (16) provides illumination outside the humanly visible spectrum of light.
3. The apparatus of claim 1 or claim 2 wherein the indicia (16) comprise a barcode.
4. The apparatus as claimed in claims 1 and 3, wherein the light source (16) provides infrared illumination.
5. The apparatus of any one of the preceding claims wherein the light source (16) provides infrared illumination within a wavelength range of about 770 to 1000 nanometres.
6. The apparatus of any one of claims 1 to 5 wherein the light source provides pulses of infrared illumination.
7. The apparatus of any one of claims 2 to 6 wherein the light source (16) provides the infrared illumination in a pulse having a pulse width ranging from about 0.1 to 1.5 milliseconds.
8. The apparatus of claim 6 or claim 7 wherein the light sensing device (26) is sensitive to the infrared illumination provided by the light source (16) and is electronically shuttered in synchronism with the pulse of infrared illumination provided by the light source (16).
9. The apparatus of any one of claims 4 to 8 further comprising an optical filter (28) disposed between the light sensing device (26) and the reflective medium (14), the optical filter (28) attenuating optical radiation outside of a desired range of infrared wavelengths.
10. The apparatus of any one of claims 4 to 9 wherein the light source (16) comprises an array of infrared light emitting diodes (18).
11. The apparatus of claim 10 wherein the light source (16) further comprise a driving circuit (20) for driving the array of infrared light emitting diodes (18) with current pulses having pulse amplitudes of about 1000 milliamperes.
12. The apparatus of any one of claims 4 to 9 wherein the light source comprises an infrared laser light source.
13. The apparatus of any one of claims 4 to 12 further comprising a cover (46) over the reflective medium

- (14) which is transmissive to infrared light and non-transmissive to visible light, such that the indicia (12) on the reflective medium (14) beneath the cover (46) are substantially undetectable to human eyesight.
14. The apparatus of any one of claims 4 to 12 further comprising graphic components (58) over the reflective medium (14) which are transmissive to infrared light and non-transmissive to visible light, such that the indicia (12) on the reflective medium (14) beneath the graphic components (58) are substantially undetectable to human eyesight.
15. The apparatus of claim 14 wherein the graphic components (58) comprise alphanumeric characters.
16. The apparatus of claim 14 wherein the graphic components (58) comprise a decoy bar code.
17. The apparatus of any one of the preceding claims wherein the light sensing device (26) further comprises a camera incorporating charge-coupled devices.
18. The apparatus of any one of the preceding claims wherein the reflective medium is disposed at least 1.5 metres away from the light source (16) and the light sensing device (26).
19. The apparatus of any one of the preceding claims further comprising a protective housing (82) in which the light source and the light sensing device are disposed.
20. The apparatus of any one of the preceding claims wherein the light source (16) provides the illumination along an illumination path (22), the light sensing device (26) receives the reflected indicia image along a reflected image path (24), and wherein an included angle between the illumination path (22) and the reflected image path (24) is no greater than about two degrees.
21. The apparatus of any one of the preceding claims wherein:
- the light sensing device (26) generates the indicia image signal as a bit-mapped image of the indicia; and
- the indicia processing system (38, 40, 42) receives a bit-mapped image and operates on the bit-mapped image to extract the indicia information therefrom.
22. The apparatus of any one of the preceding claims wherein the reflective medium (14) comprises a retro-reflective material.
23. The apparatus of any one of the preceding claims wherein the light sensing device (26) is operable to receive the reflected indicia image and generate the indicia image signal, and the indicia processing system (38, 40, 42) is operable to operate on the indicia image signal to extract the indicia information as the reflective medium (14) is moving relative to the light source (16) and the light sensing device (26).
24. The apparatus of claim 23 wherein the reflective medium is disposed on a motor vehicle, a railroad car or a cargo container.
25. The apparatus as claimed in claim 1 wherein:
- the indicia comprise a bar code;
- the light source provides illumination from a fixed location;
- the retro-reflective medium is disposed on a vehicle or container which is moveable relative to the light source, the retro-reflective medium including the bar code, the illumination reflected from the bar code comprising a reflected bar code image;
- the light sensing device is disposed at the fixed location and receives the reflected bar code image and generates a bar code image signal based thereon; and
- the indicia processing system receives the bar code image signal and operates on the bar code image signal to extract bar code information therefrom as the retro-reflective medium is moving relative to the light source and the light sensing device.
26. Use of a camera as a light sensing device in the apparatus of any one of claims 1 to 26.
27. A reflective medium including a bar code disposed on a vehicle and used as the reflective medium in the apparatus of any one of claims 1 to 23.
28. A method of identifying an object, the method comprising:
- affixing to the object a reflective medium (14) including indicia (12);
- illuminating the reflective medium (14) using a light source (16) disposed remotely from the reflective medium (14), with the indicia (12) reflecting the illumination provided by the light source (16) and with the portions of the illumination reflected from the indicia (12) comprising a reflected indicia image;
- using a light sensing device (26) disposed remotely from the reflective medium (14) to receive the reflected indicia image and to generate an indicia image signal based thereon; and

processing the indicia image signal to extract
indicia information therefrom; wherein:

the reflective medium (14) affixed to the ob-
ject includes as indicia (12) a bar code in- 5
visible to a naked human eye.

29. A method as claimed in claim 28 wherein the ex-
tracted indicia information is compared with stored
indicia information in order to identify the object. 10
30. A method as claimed in claim 29 wherein the object
is a vehicle and the method is used to identify the
vehicle to determine whether the vehicle can enter
a restricted parking area, any unidentified vehicle 15
being refused access.
31. A method as claimed in claim 30 wherein an auto-
mated barrier controls entry to the restricted parking
area and the method includes opening the automat- 20
ed barrier only on a satisfactory identification of the
indicia.
32. A method as claimed in claim 29 wherein the object
is a vehicle and the method is used to identify the 25
vehicle to correctly charge for use of a road by the
vehicle.
33. A method as claimed in claim 32 in which are issued
based upon the identification of the vehicle. 30
34. A method as claimed in any one of the claims 28 to
33 when the object is a vehicle and the reflective
medium comprises indicia additional to vehicle li- 35
cence plate information indicia.

40

45

50

55

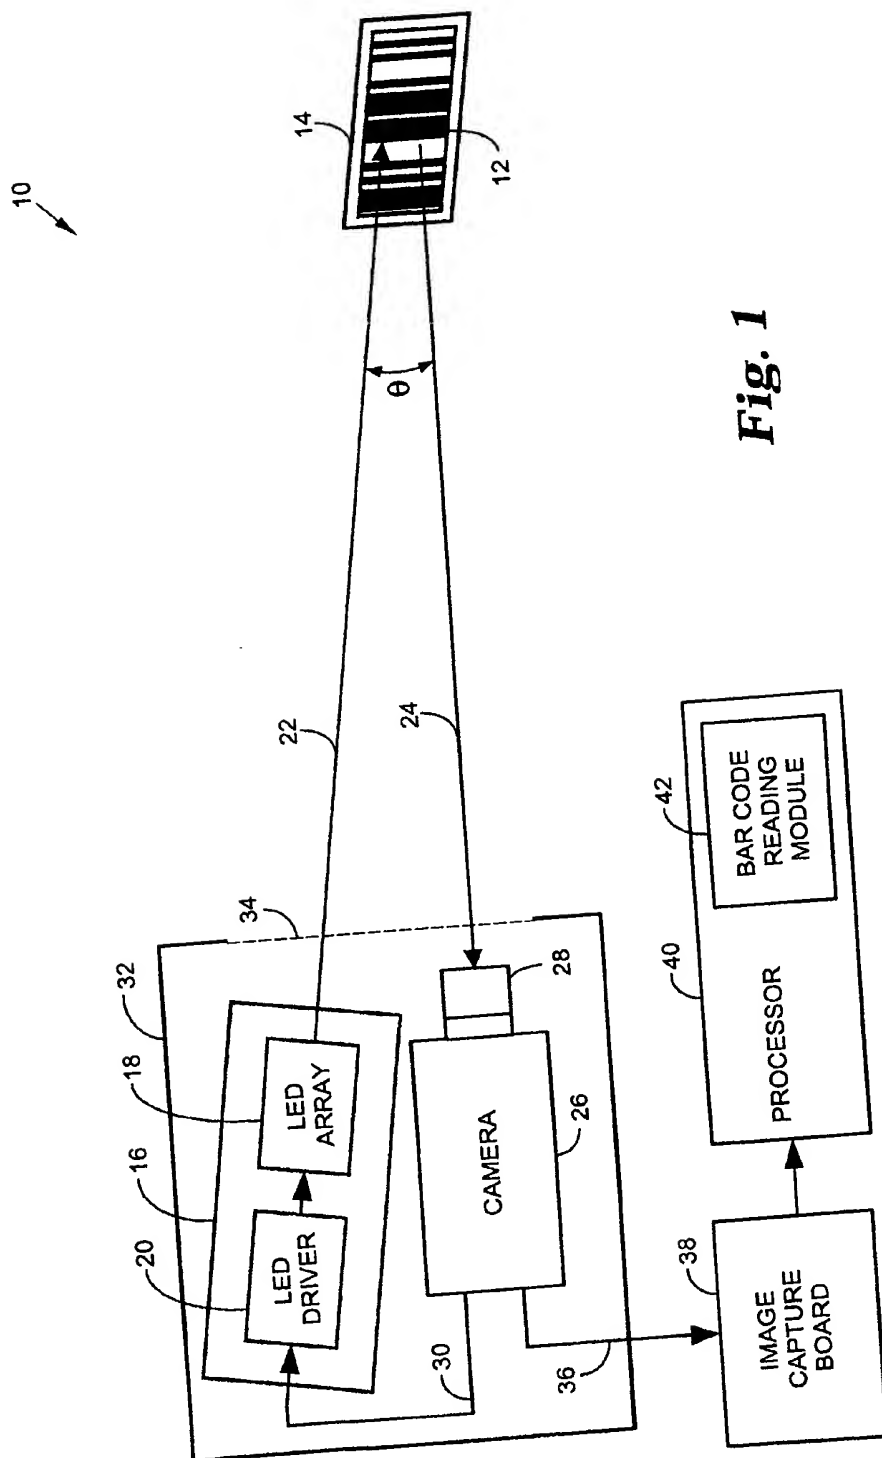


Fig. 1

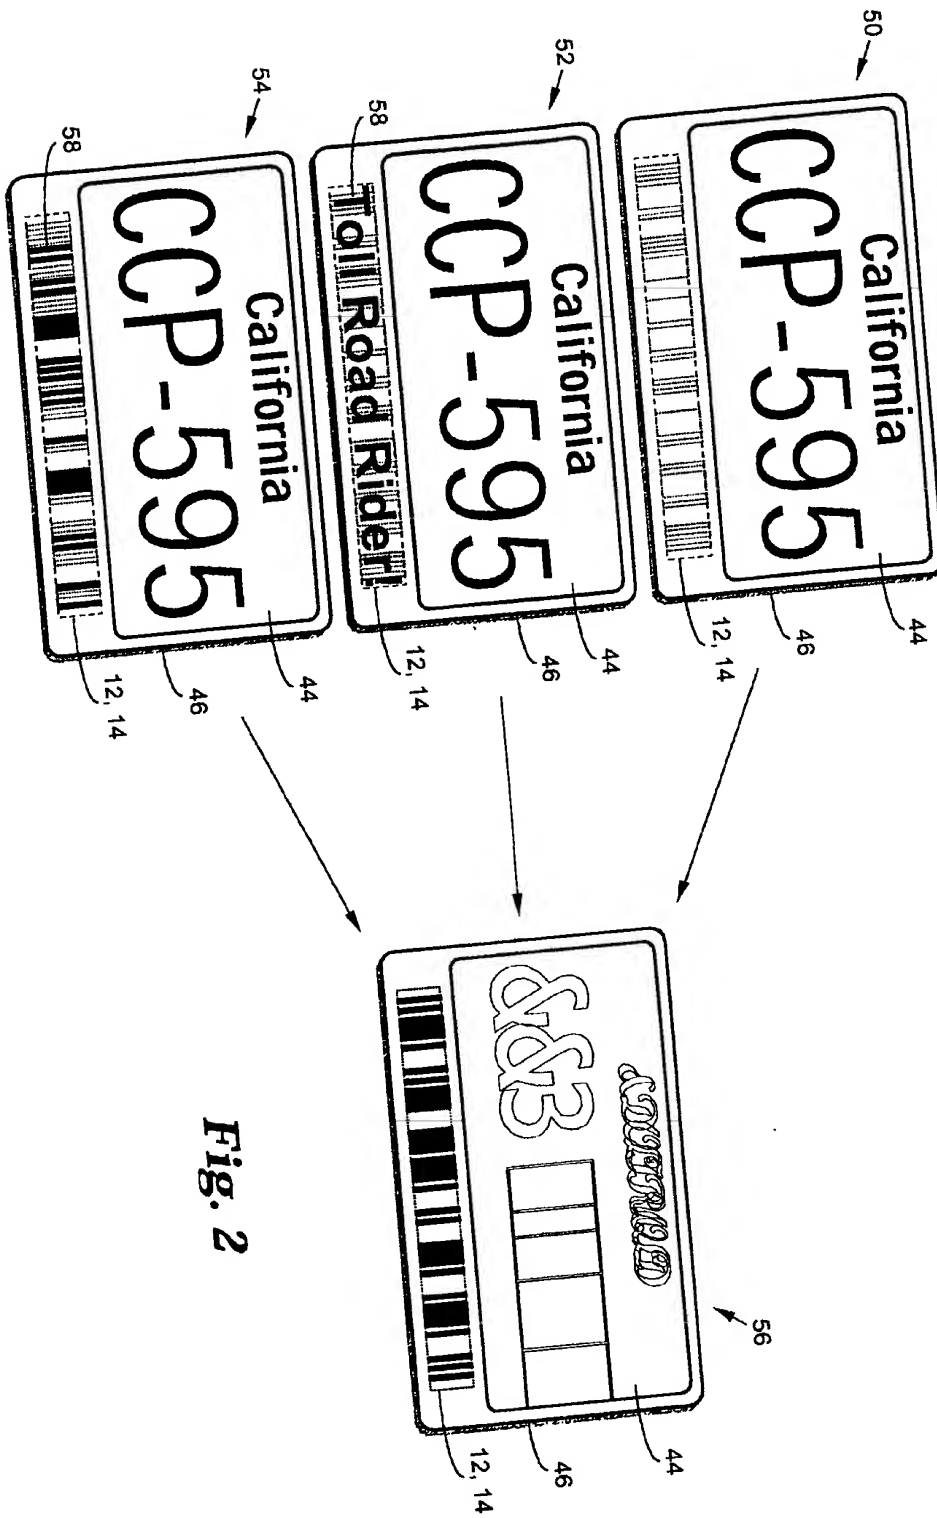


Fig. 2

EP 1 246 118 A1

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 1672

DOCUMENTS CONSIDERED TO BE RELEVANT		Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL.7)
Category	Citation of document with indication, where appropriate, of relevant passages		
X	EP 0 416 742 A (MINNESOTA MINING & MFG) 13 March 1991 (1991-03-13)	1,2,4-6, 8,9, 13-24, 26,28 7,10-12, 29-32,34	606K7/10 606K9/20
Y	* column 7, line 43 - column 11, line 13; figures 3A,3B,,4 *	7,10-12	
Y	GB 2 248 994 A (PEARPOINT LTD ;SECR DEFENCE (GB)) 22 April 1992 (1992-04-22) * page 3, line 6 - page 6, line 38; figure 3 *	29-32,34	
Y	US 4 958 064 A (KIRKPATRICK ROBERT D) 18 September 1990 (1990-09-18) * abstract; figures 1,6 *	1-4,12, 19,23, 24,28	
X	US 4 970 389 A (DANFORTH JOHN ET AL) 13 November 1990 (1990-11-13) * column 2, line 63 - column 4, line 24; figure 1 *	1-4, 21-27	606K
X	WO 99 36836 A (TEMTEC INC) 22 July 1999 (1999-07-22) * the whole document *	1,2,4,6, 9,20-23, 26	
X	GB 2 280 027 A (KNOTT JAMES) 18 January 1995 (1995-01-18) * the whole document *		
A	US 4 491 923 A (LOOK THOMAS F) 1 January 1985 (1985-01-01) * abstract; figures 1,2 *		
		-/-	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 15 July 2002	Examiner Hermann, R
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EP 1 246 118 A1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 1672

DOCUMENTS CONSIDERED TO BE RELEVANT			Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages			
A	DE 200 15 840 U (TOPAC MULTIMEDIAPRINT GMBH) 8 February 2001 (2001-02-08) * page 8, line 12 - page 9, line 27; figures 3-8 *			
A	US 5 237 164 A (TAKADA HIROHISA) 17 August 1993 (1993-08-17) * column 7, line 46 - column 8, line 8; figure 7 *			
				TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			Examiner	
Place of search MUNICH		Date of completion of the search 15 July 2002	Hermann, R	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03-02 (P04001)

EP 1 246 118 A1

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 1672

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-07-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0416742	A	13-03-1991	AU 633599 B2	04-02-1993
			AU 5871090 A	07-02-1991
			CA 2020380 A1	04-02-1991
			EP 0416742 A2	13-03-1991
			IE 902400 A1	13-02-1991
			JP 3075996 A	29-03-1991
GB 2248994	A	22-04-1992	AU 8409091 A	17-03-1992
			BR 9106764 A	29-06-1993
			CA 2089356 A1	18-02-1992
			EP 0543904 A1	02-06-1993
			FI 930681 A	16-02-1993
			WO 9203808 A1	05-03-1992
			HK 1007042 A1	26-03-1999
			JP 6503662 T	21-04-1994
			NO 930553 A	17-02-1993
US 4958064	A	18-09-1990	FR 2642542 A1	03-08-1990
			GB 2227589 A	01-08-1990
			JP 2282881 A	20-11-1990
US 4970389	A	13-11-1990	NONE	
WO 9936836	A	22-07-1999	EP 1049962 A1	08-11-2000
			WO 9936836 A1	22-07-1999
GB 2280027	A	18-01-1995	NONE	
US 4491923	A	01-01-1985	CA 1190624 A1	16-07-1985
			AT 47236 T	15-10-1989
			AU 555112 B2	11-09-1986
			AU 8211982 A	07-10-1982
			DE 3279976 D1	16-11-1989
			EP 0062473 A2	13-10-1982
			JP 1648554 C	13-03-1992
			JP 3015788 B	01-03-1991
			JP 57189045 A	20-11-1982
DE 20015840	U	08-02-2001	DE 19945642 A1	05-04-2001
			DE 20015840 U1	08-02-2001
			EP 1102267 A2	23-05-2001
US 5237164	A	17-08-1993	JP 2297497 A	07-12-1990
			JP 2814553 B2	22-10-1998
			JP 3003094 A	09-01-1991

EPD FORM P0102

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82